



Suspended decorative luminaire for LED light sources.

TECHNICAL DATA	Mounting: suspended, on wire suspension (included)
	Body: plastic polyester reinforced with fiberglass
	Colour: white, black
	Diffuser: opal plexiglass (PLX), microprismatic diffuser (MPRM)
ELECTRICAL DATA	Power: 220-240V 50/60Hz
	Includes light source: yes
	Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: opal diffuser, DALI, DIM 1..10V
GENERAL DATA	Warranty: 3 years + 2 years after project registration
	Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Diffuser: opal plexiglass (PLX)							
20002X.5L01.1X1	107	126	15600	12300	98	4000	≥80
20002X.5L02.1X1	107	126	15000	11900	94	3000	≥80
Diffuser: microprismatic diffuser (MPRM)							
20002X.5L01.1X2	107	126	15600	12300	98	4000	≥80
20002X.5L02.1X2	107	126	15000	11900	94	3000	≥80


20002 [] .5L01.1 [] 2

	Colour of decorative elements
1	pink
2	red
3	green
4	blue
5	yellow
	Body colour
1	white
3	black

Code	Dimensions [mm] LWH	Mounting dimensions [mm] LD	Pallet quantity	Quantity in package	Net weight [kg]
Diffuser: opal plexiglass (PLX)					
20002X.5L01.1X1	886 886 1060	400 80	1	1	21.0
20002X.5L02.1X1	886 886 1060	400 80	1	1	21.0
Diffuser: microprismatic diffuser (MPRM)					
20002X.5L01.1X2	886 886 1060	400 80	1	1	21.0
20002X.5L02.1X2	886 886 1060	400 80	1	1	21.0

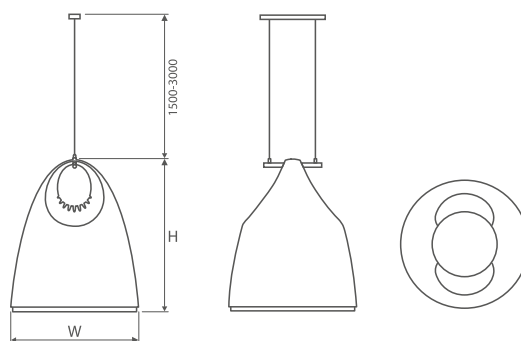

Designed by LUG Design Team

OTHER PICTURES**LIGHT BEAM CURVES****OTHER PROJECTS**

Hamama Bilo, Tel Aviv, Israel



Frikirken Church, Norway