



Suspended decorative luminaire for LED light sources.

TECHNICAL DATA	Mounting: suspended, on wire suspension (included) Body: powder-painted aluminum profile Colour: black
ELECTRICAL DATA	Diffuser: opal plexiglass (PLX), microprismatic diffuser (MPRM) Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: DIM 1..10V, DALI Additional information: white or gray body colour available on request Other remarks: Aluminum fastening screw \varnothing 18 for luminaires in all dimensions
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques, airports




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
200073.5L01.11X	120°	39	46	5400	4050	88	3000	≥80
200073.5L02.11X	120°	39	46	5550	4180	91	4000	≥80
200073.5L03.12X	120°	71	83	9850	7400	89	3000	≥80
200073.5L04.12X	120°	71	83	10200	7650	92	4000	≥80
200073.5L05.13X	120°	174	204	24200	18150	89	3000	≥80
200073.5L06.13X	120°	174	204	25000	18810	92	4000	≥80
200073.5L07.14X	120°	353	415	49200	36960	89	3000	≥80
200073.5L08.14X	120°	353	415	51000	38290	92	4000	≥80
200073.5L09.151	120°	723	850	101450	73100	86	3000	≥80
200073.5L10.151	120°	723	850	105000	78790	93	4000	≥80

200073.5L01.11

	Type of raster / diffuser
1	satin
2	microprismatic diffuser


Code	Dimensions [mm] WH	Pallet quantity	Quantity in package	Net weight [kg]
200073.5L01.11X	450 110	6	1	5.8
200073.5L02.11X	450 110	6	1	5.8
200073.5L03.12X	650 110	6	1	10.0
200073.5L04.12X	650 110	6	1	10.0
200073.5L05.13X	950 110	3	1	20.0
200073.5L06.13X	950 110	3	1	20.0
200073.5L07.14X	1350 110	1	1	35.0
200073.5L08.14X	1350 110	1	1	35.0
200073.5L09.151	1950 110	1	1	70.0
200073.5L10.151	1950 110	1	1	70.0



OTHER PICTURES

MPRM

PLX

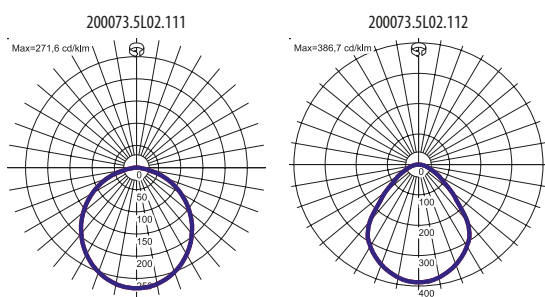LIGHT BEAM CURVES**OTHER PROJECTS**

Kastrup Airport, Copenhagen, Denmark