

Suspended decorative luminaire for LED light sources.

TECHNICAL DATA

Mounting: suspended, on wire suspension (included)

Body: powder painted steel sheet and top quality plastic

Colour: ecru

Diffuser: opal plexiglass (PLX)

ELECTRICAL DATA

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

OPTICAL DATA

Way of lighting: direct

GENERAL DATA

Available on request: DALI


Warranty: 5 years

Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques



Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
210050.5L01.112	120°	3x10	36	3000	2100	58	4000	≥80
210050.5L02.112	120°	3x10	36	3000	2100	58	3000	≥80

Code	Dimensions [mm] L W H D	Pallet quantity	Quantity in package	Net weight [kg]
210050.5L01.112	930 123 150 604	24	1	4.0
210050.5L02.112	930 123 150 604	24	1	4.0

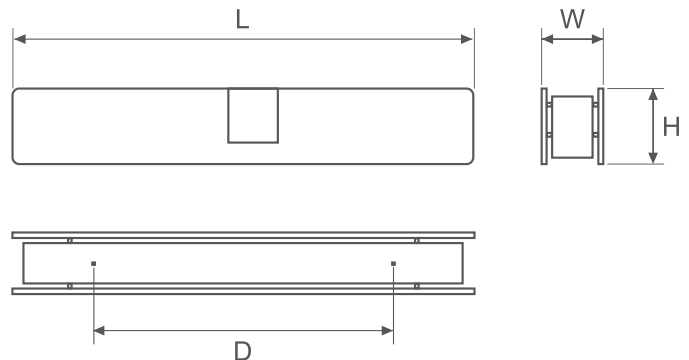

OTHER PICTURES



LIGHT BEAM CURVES

Designed by LUG Design Team


Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 25-12-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires



SPOSÓB ŚWIECENIA

210050.5L01.112

