

Suspended decorative luminaire for LED light sources.

#### TECHNICAL DATA

**Mounting:** suspended, on wire suspension (included)  
**Body:** black plastic polyester material (resin), optic frame - galvanized steel

#### ELECTRICAL DATA

**Colour:** black  
**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** ED

**Way of lighting:** direct

#### OPTICAL DATA

#### GENERAL DATA

**Available on request:** DIM 1..10V, DALI

**Additional information:** The possibility of using one or more power supplies in the luminaire.


**Warranty:** 5 years

**Application:** offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




| Code            | Beam angle | Power LED [W] | Luminaire power [W] | Lumen LED [lm] | Lumen luminaire [lm] | Efficacy [lm/W] | Colour temperature [K] | CRI/Ra |
|-----------------|------------|---------------|---------------------|----------------|----------------------|-----------------|------------------------|--------|
| 250023.5L301.12 | 24°        | 53            | 62                  | 4680           | 4680                 | 75              | 4000                   | 92     |
| 250023.5L302.12 | 24°        | 53            | 62                  | 4290           | 4290                 | 69              | 3000                   | 92     |
| 250023.5L303.12 | 40°        | 53            | 62                  | 4680           | 4680                 | 75              | 4000                   | 92     |
| 250023.5L304.12 | 40°        | 53            | 62                  | 4290           | 4290                 | 69              | 3000                   | 92     |

| Code            | Dimensions [mm] L W H | Mounting dimensions [mm] L W | Pallet quantity | Quantity in package | Net weight [kg] |
|-----------------|-----------------------|------------------------------|-----------------|---------------------|-----------------|
| 250023.5L301.12 | 1197 340 92           | 490 80                       | 8               | 1                   | 6.8             |
| 250023.5L302.12 | 1197 340 92           | 490 80                       | 8               | 1                   | 6.8             |
| 250023.5L303.12 | 1197 340 92           | 490 80                       | 8               | 1                   | 6.8             |
| 250023.5L304.12 | 1197 340 92           | 490 80                       | 8               | 1                   | 6.8             |

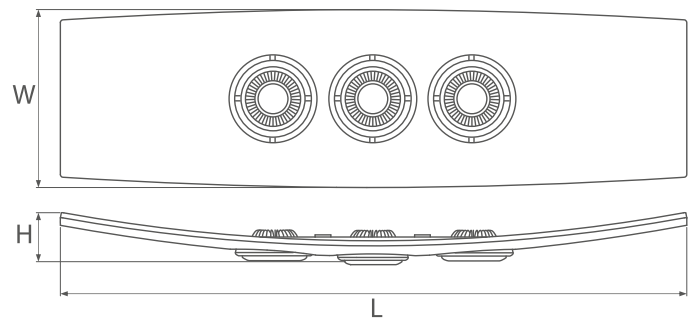

## LIGHT BEAM CURVES

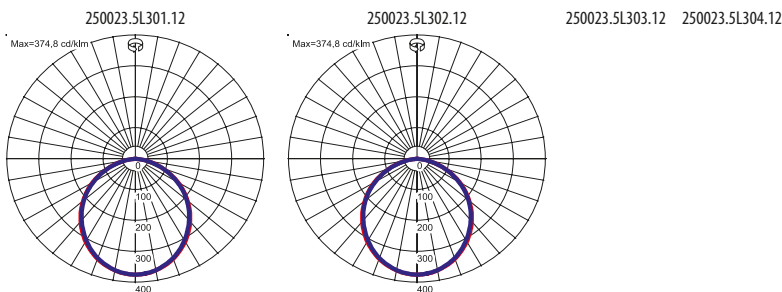

## SPOSÓB ŚWIECENIA

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)


Date of issue: 25-12-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

250023.5L301.12



250023.5L302.12



250023.5L303.12 250023.5L304.12

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

Date of issue: 25-12-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires